

COOLSET

Operating Instructions



TFM 450

Table Fusing Machine

COOLSET

Coolset TFM 450
Coolset TFM 450 Table Fusing Machine

Service department

VEIT BRISAY Shanghai

Veit Brisay Press Equip.(Shanghai) Co. Ltd
Rm 3204, Tower 2, Kerry Everbright City,
218 West Tian Mu Road, Shanghai,
China 200070
Phone: +86 (21) 63530121
Fax: +86 (21) 63530320
e-mail: info@veit.com.cn

VEIT BRISAY Hong Kong

VEIT HONG KONG LIMITED
ROOM 1115, 11/F, 8 On Ping Street, Sha Tin,
Hong Kong
Phone: (852) 2834-9986
Fax: (852) 2836-0005
e-mail: service@veit.com.hk

Table of Contents

| | | |
|----------|--|-----------|
| 1 | <i>Product Information</i> | 1 |
| 1.1 | <i>Description</i> | 1 |
| 1.2 | <i>Ordering information and Options Coolset TFM450</i> | 2 |
| 1.3 | <i>Technical Data</i> | 2 |
| 2 | <i>Operating Instructions</i> | 3 |
| 2.1 | <i>Introduction</i> | 3 |
| 2.2 | <i>Warnings and Safety Instructions</i> | 4 |
| 2.3 | <i>Installation instructions</i> | 6 |
| 2.3.1 | <i>Installation</i> | 6 |
| 2.3.2 | <i>Electrical connection</i> | 6 |
| 2.4 | <i>Operating</i> | 7 |
| 2.4.1 | <i>Commissioning and Start-up</i> | 7 |
| 2.4.2 | <i>The holding's adjustments</i> | 8 |
| 2.4.3 | <i>Thermostat setting</i> | 9 |
| 2.4.4 | <i>Upper belt replacement</i> | 10 |
| 2.4.5 | <i>Lower belt replacement</i> | 13 |
| 2.4.6 | <i>Breaks and Finishing Service</i> | 16 |
| 2.5 | <i>Maintenance and Service</i> | 17 |
| 3 | <i>Spare Parts List</i> | 18 |
| 4 | <i>Circuit Diagram Electric</i> | 21 |

COOLSET


Coolset TFM 450
Coolset TFM 450 Table Fusing Machine

1 Product Information

1.1 Description

This fusing machine is the ideal solution for fusing a wide variety of interlinings and face fabrics.

This is a continuous type machine therefore production is greatly increased. Seamless belts have been used to increase the durability of the belt; the machine will accommodate kinds of fabrics, and produce consistent high quality bonding.

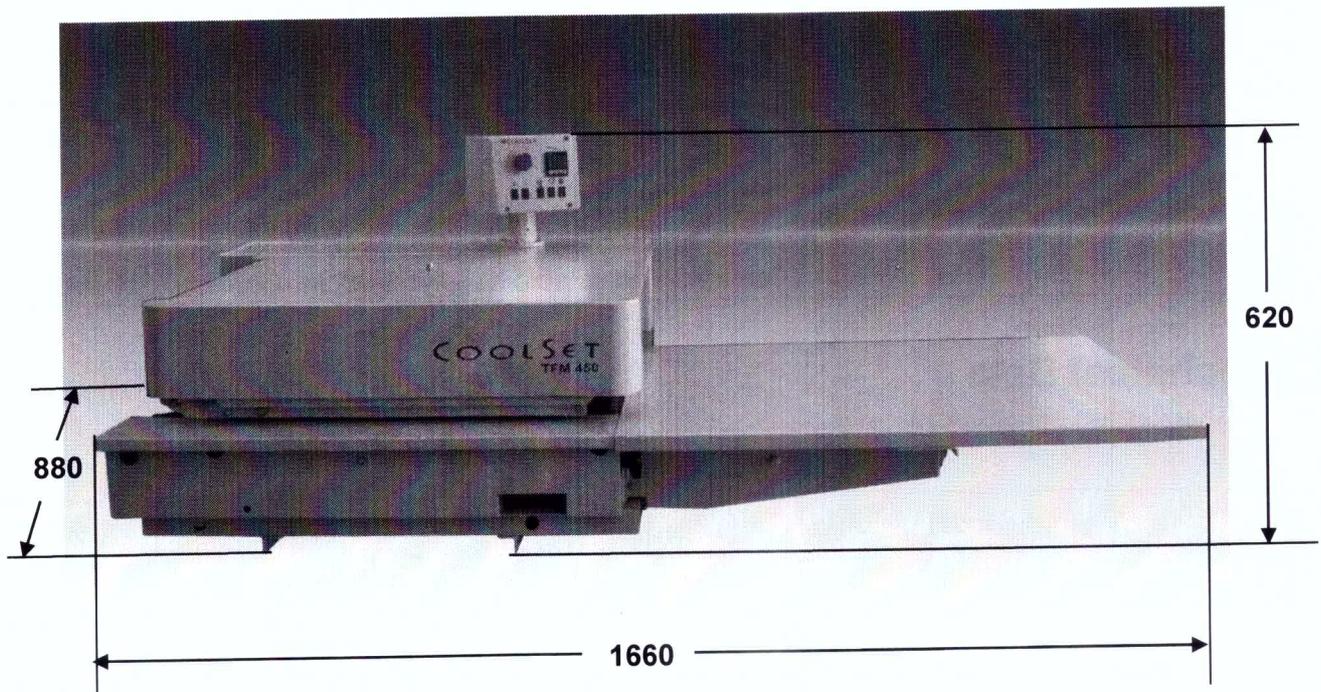

Field of application:

- Casual and classic shirts ,trousers and skirts
- Men, women and children shirts, trousers and skirts
- Sports shoes
- Fusing a wide variety of interlinings and face fabrics

1.2 Ordering information and Options Coolset TFM450

| Art. No. | DESIGNATION |
|--|--|
| SC010027 | STANDARD: Coolset TFM 450 fusing machine |
| HJ020076 HJ020077 HJ020078 SC040048 | OPTIONAL: Unloading slide Rotating strip-off device Cleaning kit Table with adjustable height 65-80cm -Coolset TFM 450 |

1.3 Technical Data

| | | |
|--------------------------|--------|------------------------|
| Model | | TFM 450 |
| Voltage | | 1P-220V/50Hz |
| Power | Heater | 4.0Kw |
| | Motor | 40W |
| Fusing temperature (MAX) | | 195°C |
| Pressing pressure (MAX) | | 1.5kg/cm ² |
| Belt speed (MAX) | | 4m/min |
| Fusing time | | 6~24s |
| Working width | | 450mm |
| Dimension | | L 880 x W 1660 x H 620 |
| Weight | | 167Kg |

2 Operating Instructions

2.1 Introduction

Dear customer,

Thank you for your confidence in our products.

By purchasing this fusing machine TFM 450 you have chosen a unit, which combines excellent quality, simplicity and reliability.

Please carefully study the operating instructions in order to make full use of this machine.

Section 1 describes the product information.

Section 2 describes the operating Instructions.

Section 3 contains a list of important spare parts.

Section 4 contains the electric circuit diagram.

We wish you much success.

2.2 Warnings and Safety Instructions

Only use the voltage and type of current shown on the machine plate.

The customer is responsible for the mains supply and ensures the earthing security of the machine.

Take note of the regulations of the local electric suppliers.

Electric faults must only be repaired by qualified personnel.

Disconnect the power supply before opening the machine.

In an emergency, the machine can be stopped by pushing off the stop button (7) (See page 10) or by pulling out the main plug or by operating the main switch (1) (See page 10).

This machine operates at high-temperature; therefore the cover becomes very hot. Danger of burning during operation.

Please don't touch the machine and belt with your hand during operation: Danger of burning and injury from moving parts.

Be careful when you insert material into the machine. Danger of burning and the injury if clothing or body parts are sandwiched between machine parts.

After the operation, please turn off the timer switch. When the surface temperature of the belt is below 90 degrees, the machine stops automatically, and then disconnects the main switch.

Please disconnect the power supply and ensure the machine is in cool condition, then remove the strip-off device for cleaning. Moreover, when you remove the finished material from the exit, pay attention not to be caught in the rotary strip off device.

Clean the belt with a well dried cloth when the operation is over. Please reduce the belt speed for fear of such accidents as burn and material involved.

Please check the belts at the end of every day, to remove all glue from the belts, so as not to damage belts before you begin any maintenance work. You must ensure the electrical supply is off and the machine is cool to prevent accidents and burns.

Please understand all switches of this machine before operating them.

Please keep enough space around the machine for maintenance.

The machine has emergency stop switches when the belt over moves too far to the left or right. Please

COOLSET

Coolset TFM 450
Coolset TFM 450 Table Fusing Machine

take out the material with the manual handle of the attachment if emergency stop or power failure caused machine stop working.

2.3 Installation instructions

2.3.1 Installation

This machine weighs 167kg. Ensure to install on a robust table and in a level position.

Please install the front table on front table support of the main unit.


2.3.2 Electrical connection

Connect the machine to an exclusive power source corresponding with the power consumption by referring to the specifications.


Ensure the machine is correctly grounded according to the electrical requirements of your country. This is a single phase machine so the directing of the belt will always be correct.

2.4 Operating


2.4.1 Commissioning and Start-up



1

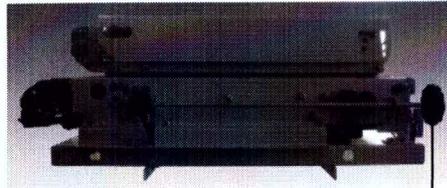

2

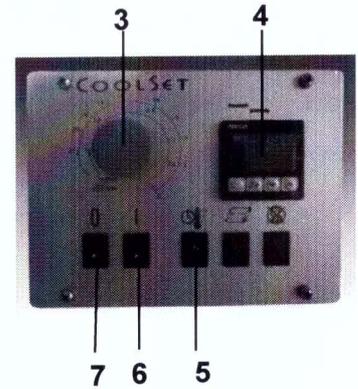

7

6

5

1. Main switch
2. Pressure adjustment handle
3. Knob for potentiometer
4. Temperature thermostat
5. Timer switch
6. Start button
7. Stop button

Set the main switch (1) to the position "ON". (Ensure the timer switch (5) is set to "OFF").

Press the start button (6). (Ensure timer switch (5) has been reset).

Set designated pressure by turning the pressure adjustment handle (2).


Set the fusing time by using the potentiometer knob (3).

Set the setting temperature by using the temperature thermostat (4). After the machine has reached the set temperature, please wait at least 10 minutes longer before starting production. Now you are able to start the fusing operation.

2.4.2 The holding's adjustments


In case you want to strengthen the clamping effect of the belts at the entrance of the machine for pocket folding and similar use, turn the adjustment handle (7) to the right to reduce the gap.

The hand wheel 8 is used for adjusting the belt pressure. Refer to the pressure gauge to see pressure in below picture No.9. Pressure increases from -1 to 1.5. Warning: pressure regulating should not exceed 1.5.

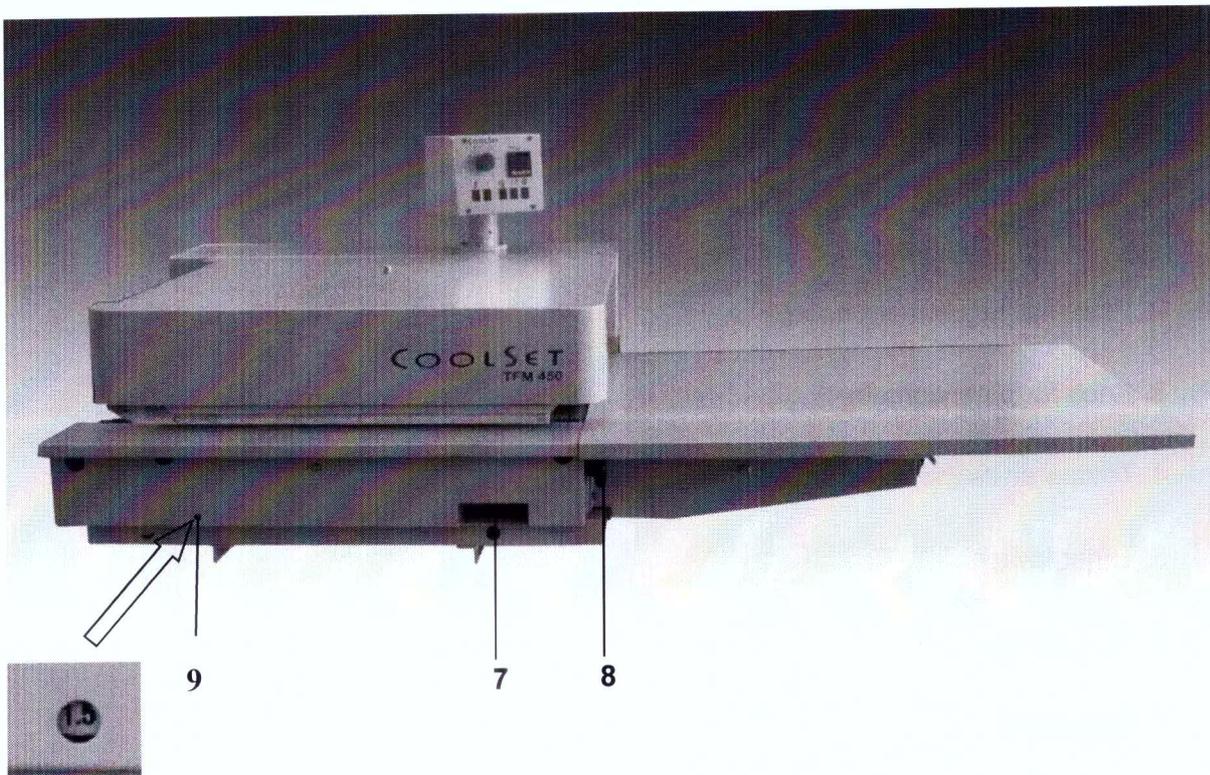

- 7. Belt gap adjustment handle
- 8. Pressure adjustment handle
- 9. Pressure gauge

2.4.3 Thermostat setting


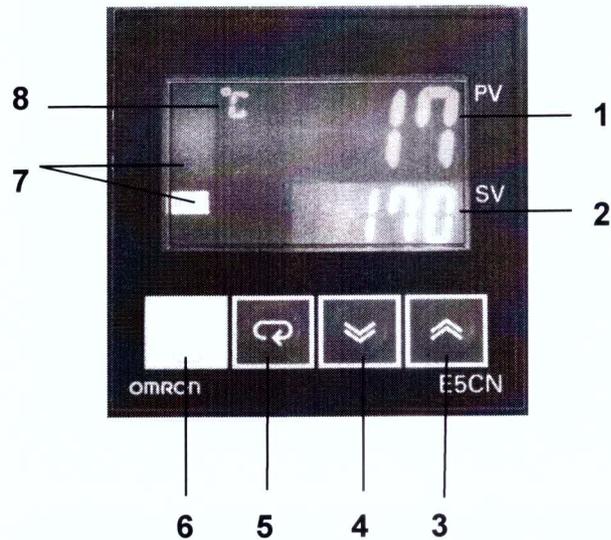


| Position | Functions |
|----------|---|
| 1 | Temperature display ACTUAL VALUE |
| 2 | Temperature display SET VALUE |
| 3 | Up button for adjustment of set temperature |
| 4 | Down button for adjustment of set temperature |
| 5 | Button for operating methods (only for skilled personnel) |
| 6 | Button for levels (only for skilled personnel) |
| 7 | Function indication |
| | Light " Out 1 " is off (The heating system is switched off) |
| | Light " Out 1 " is on(The heating system is switched on) |
| 8 | Temperature measuring unit in °C (Grad Celsius) or F (Fahrenheit) |


Note:

Please use the up and down buttons (pos. 3 + 4) for the setting of set temperature (pos. 2).

2.4.4 Upper belt replacement

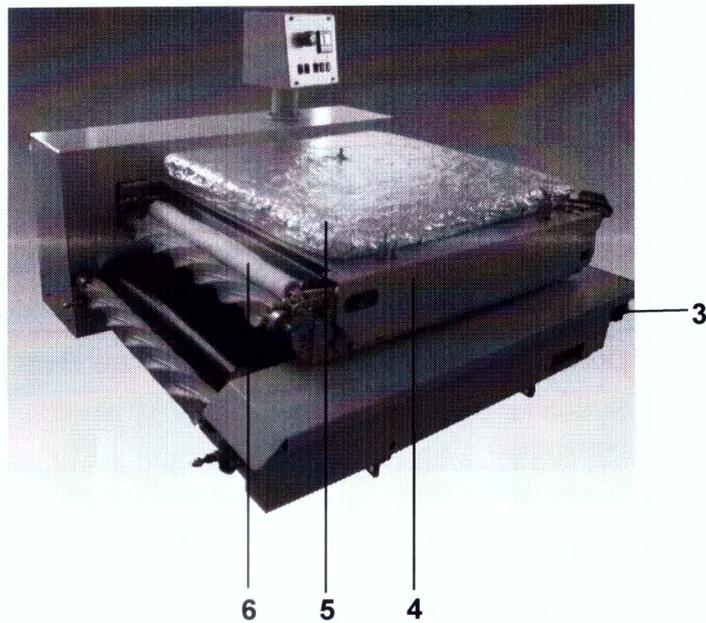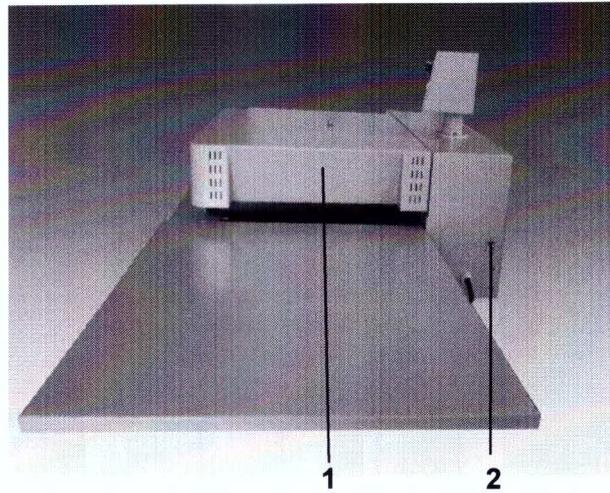

1. External cover
2. Power switch
3. Pressure adjustment handle
4. Cover
5. Heat insulation
6. Wiper bar

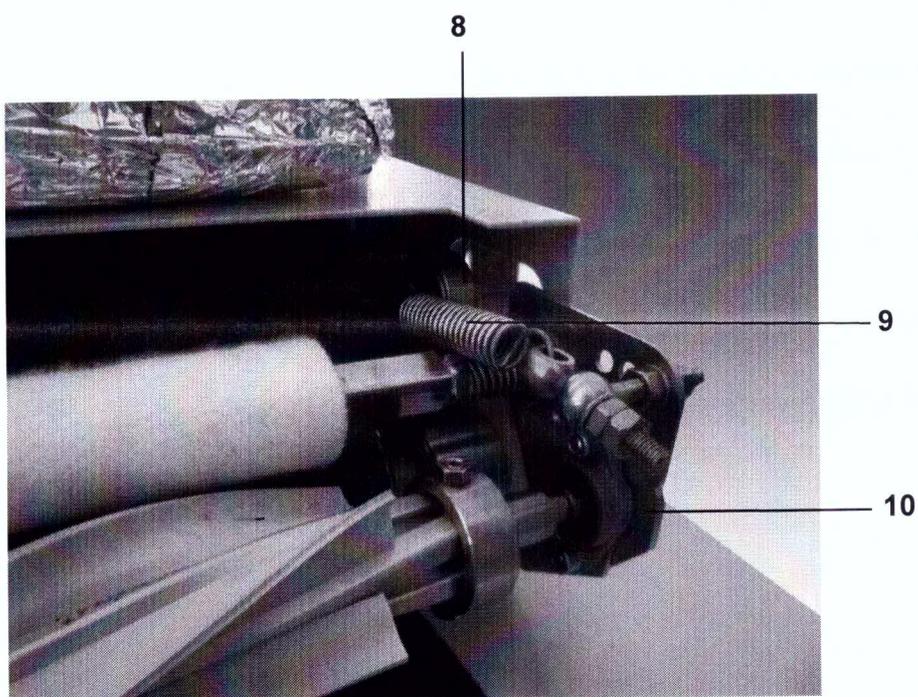

- 7. Belt tracking limit switches
- 8. Tensioning roller
- 9. Tensioning spring
- 10. Rotating strip off device support

Upper belt replacement

Switch off main switch (2), disconnect power plug and set the pressure to “-1” by the pressure adjustment handle (3).

Dismantle the external cover (1).

Remove upper belt tracking limit switches (7).

Remove the cover (4) and heat insulation (5).

Remove the wiper bar (6).

Remove the tensioning spring (9) of both sides.



Remove the tensioning roller (8).

Remove the rotary strip-off support (10).



Remove the belt.

Reassemble in the reverse order.

2.4.5 Lower belt replacement

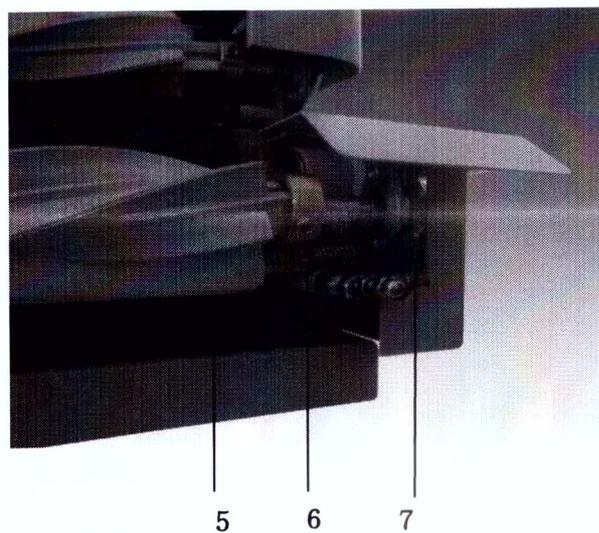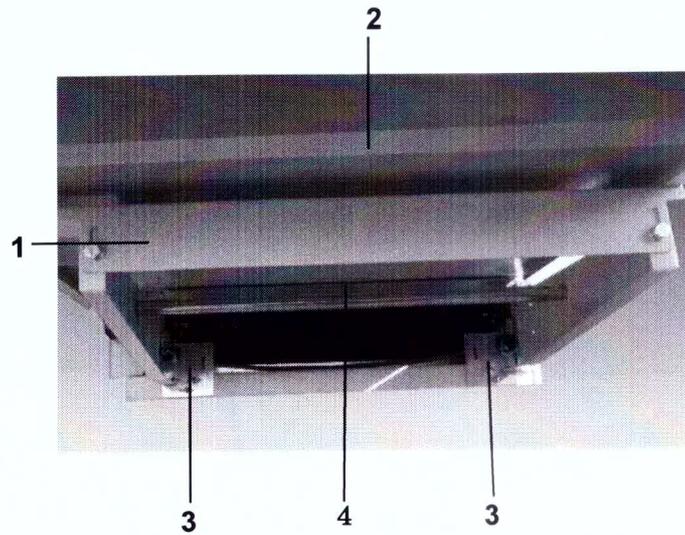

1. Front table support
2. Front table
3. Belt tracking limit switches support
4. Belt protection support
5. Tensioning roller
6. Tensioning springs
7. Rotating strip-off device support

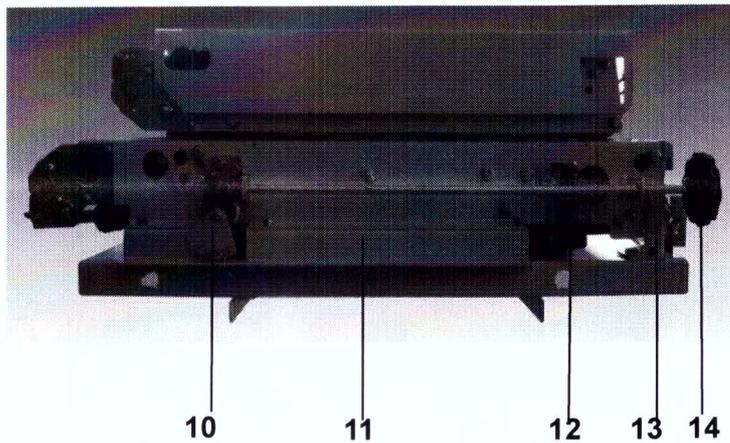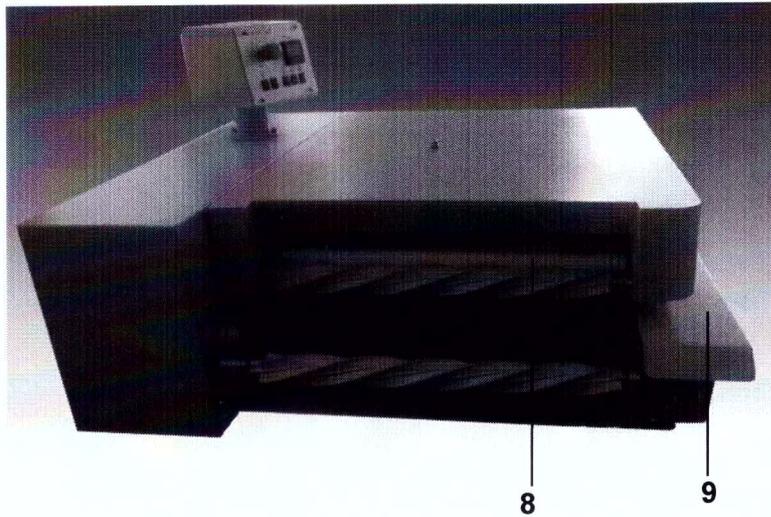

8. Wiper bar

9. Side table

10. Pressure meter

11. Frame spacer

12. Belt gap adjustment handle

13. Left frame support

14. Pressure adjustment handle

Lower belt replacement

Switch off main switch, disconnect power plug and set the pressure to " -1 " by the pressure adjustment handle (14)

Remove the front table (2).

Remove the front table support (1).

Remove the belt protection support (4).

Remove the side table (8).

Remove the left frame support (13).

Remove the left lower belt tracking limit switches support (3).

Remove the pressure meter (10).

Remove the pressure adjustment handle (14).

Remove the wiper bar (9)

Remove the tensioning springs (6).

Remove the tensioning roller (5).

Remove the rotating strip-off device support (7).

Remove the frame spacer (11).

Remove the belt.

Reassemble in the reverse order.


2.4.6 Breaks and Finishing Service

Breaks

If an emergency stop occurs or put other things to the belt's entrance by mistake, you can stop the machine by main switch and adjust the pressure to 0, then put the T-typed wrench on to the screw for emergency use on the side of the main unit and take out the material.

In the case where a hard object has been put in the machine, ensure complete safety before resuming the operation. Carefully check the teflon belt and rubber parts of the pressure roller for any damage, Replace if necessary.

In the case of an electric failure, adjust the pressure to 0, then put the T-typed wrench on to the screw for emergency use on the side of the main unit and take out the material.

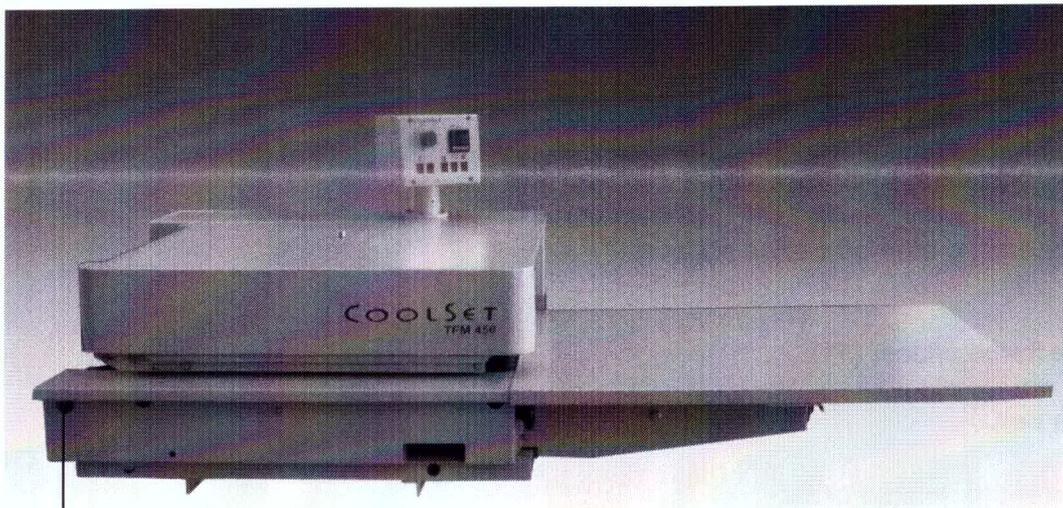

Emergency screw

Finishing Operation

Set the pressure to 0 (zero).

Set the timer switch to 'ON'. The machine stop automatically when the surface temperature of the belt is below 90 degrees.

When the machine has stopped, turn off the power supply.

2.5 Maintenance and Service

The machine must always be cleaned before switching off: Any remaining adhesive hardens overnight and can destroy the belts when the machine is restarted.





We recommend KANFIX non silicon belt cleaner.




Never clean with aggressive materials containing silicon or sharp, hard tools: They shorten the life of the belts and rubber coated rollers.

Cleaning the wiper bar

The wiper bar is installed at the rear of the machine. At the start of the cleaning procedure, pay attention to the cleaning surface and ensure it makes contact with to belt. Check the wiper bar at least twice a day and if necessary change the dirty surface.


3 Spare Parts List

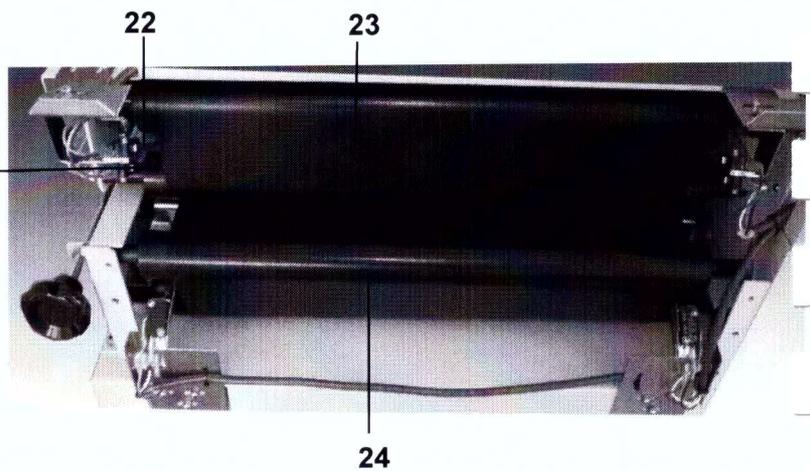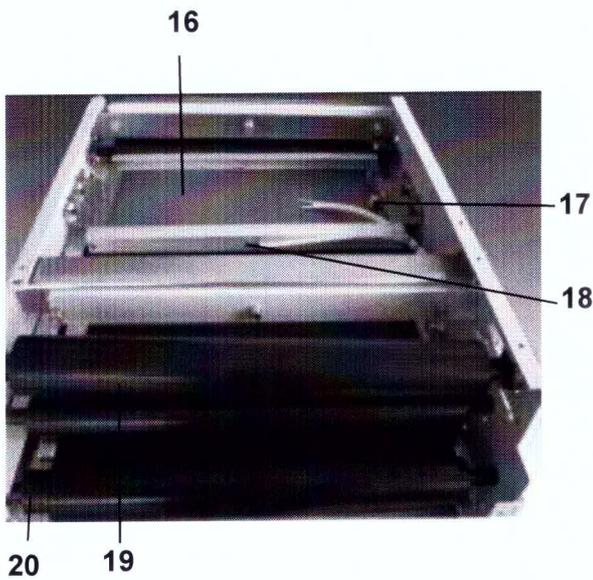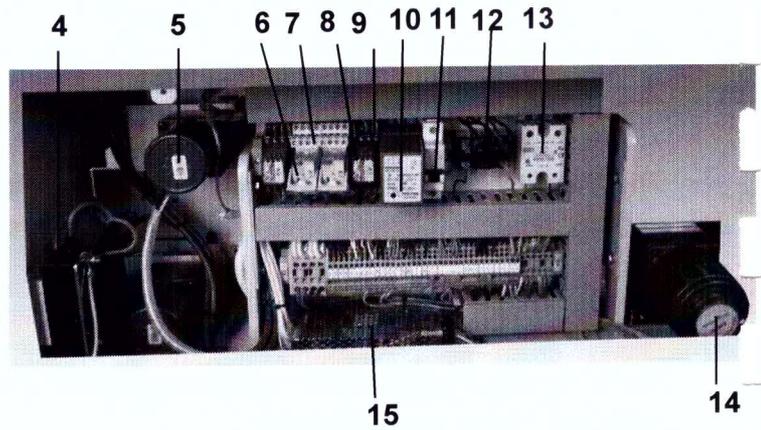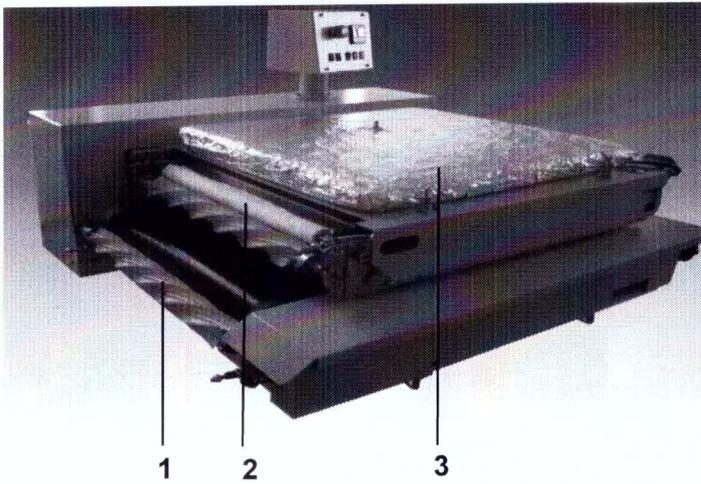


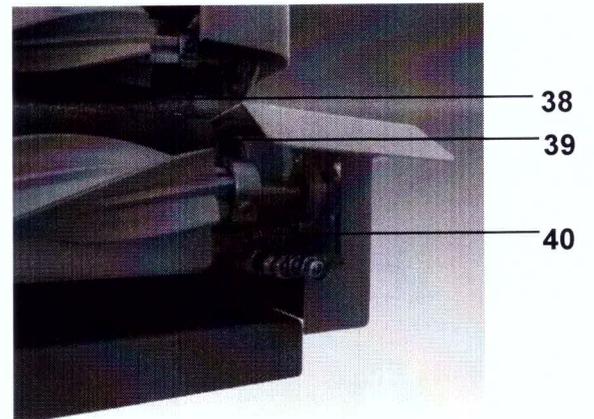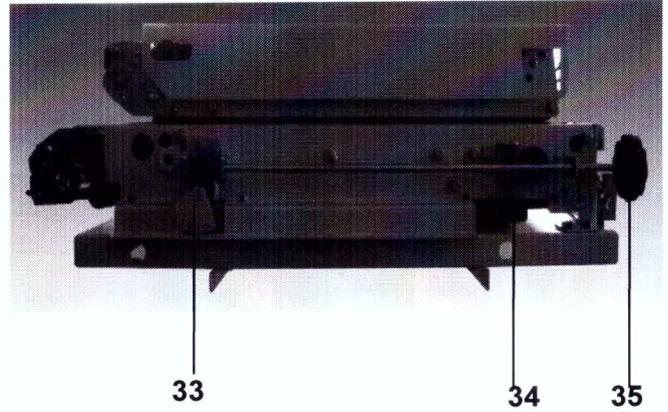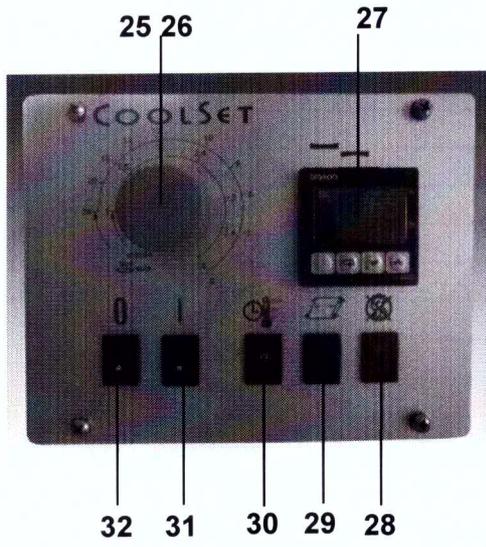


| <i>Position</i> | <i>Designation</i> | <i>type</i> | <i>Art.-No.</i> |
|-----------------|--|-------------|-----------------|
| 1 | Rotary strip-off device | | HJ020077 |
| 2 | Wiper bar | | FL020343 |
| 3 | Heat insulation | | FL030632 |
| 4 | Power switch | | DQ010371 |
| 5 | Servo motor | | DQ010317 |
| 6 | Relay | | DQ010173 |
| 7 | Relay seat | | DQ010174 |
| 8 | Relay | | DQ010177 |
| 9 | Relay seat | | DQ010178 |
| 10 | Electronic speed regulator | | DQ020153 |
| 11 | Circuit breaker | | DQ010015 |
| 12 | Control relay | | DQ020151 |
| 13 | Solid state relay | | DQ010209 |
| 14 | Geared motor | | DQ010316 |
| 15 | DC 24V power supply | | DQ010033 |
| 16 | Heating element | | DQ010354 |
| 17 | Thermal protector | | DQ010355 |
| 18 | Thermo-couple | | DQ010370 |
| 19 | Correcting roller | | HJ020083 |
| 20 | Supporting roller | | HJ020086 |
| 21 | Belt tracking limit switch (Emergency stop) | | DQ010369 |
| 22 | Belt tracking limit switch | | DQ010369 |
| 23 | Upper Teflon belt | | FL030641 |
| 24 | Lower Teflon belt | | FL030642 |
| 25 | Potentiometer | | DQ020320 |
| 26 | Knob for potentiometer | | DQ020300 |
| 27 | Temperature thermostat | | DQ020150 |
| 28 | Malfunction indicator | | DQ020324 |
| 29 | Transfer belt indicator | | DQ020324 |
| 30 | Timer switch | | DQ020323 |
| 31 | Start botton | | DQ020322 |
| 32 | Emergency switch | | DQ020321 |
| 33 | Pressure meter | | BJ090032 |
| 34 | Belt gap adjustment handle | | FL030649 |
| 35 | Pressure adjustment handle | | FL030630 |
| 36 | Tensioning roller | | HJ020085 |
| 37 | Tensioning spring | | FL020341 |
| 38 | Upper pressure roller | | FL030633 |
| 39 | Lower pressure roller | | FL030634 |
| 40 | Cleaning spring | | FL020337 |
| 41 | KANFIX belt cleaner | | JK020213 |

4 Circuit Diagram Electric

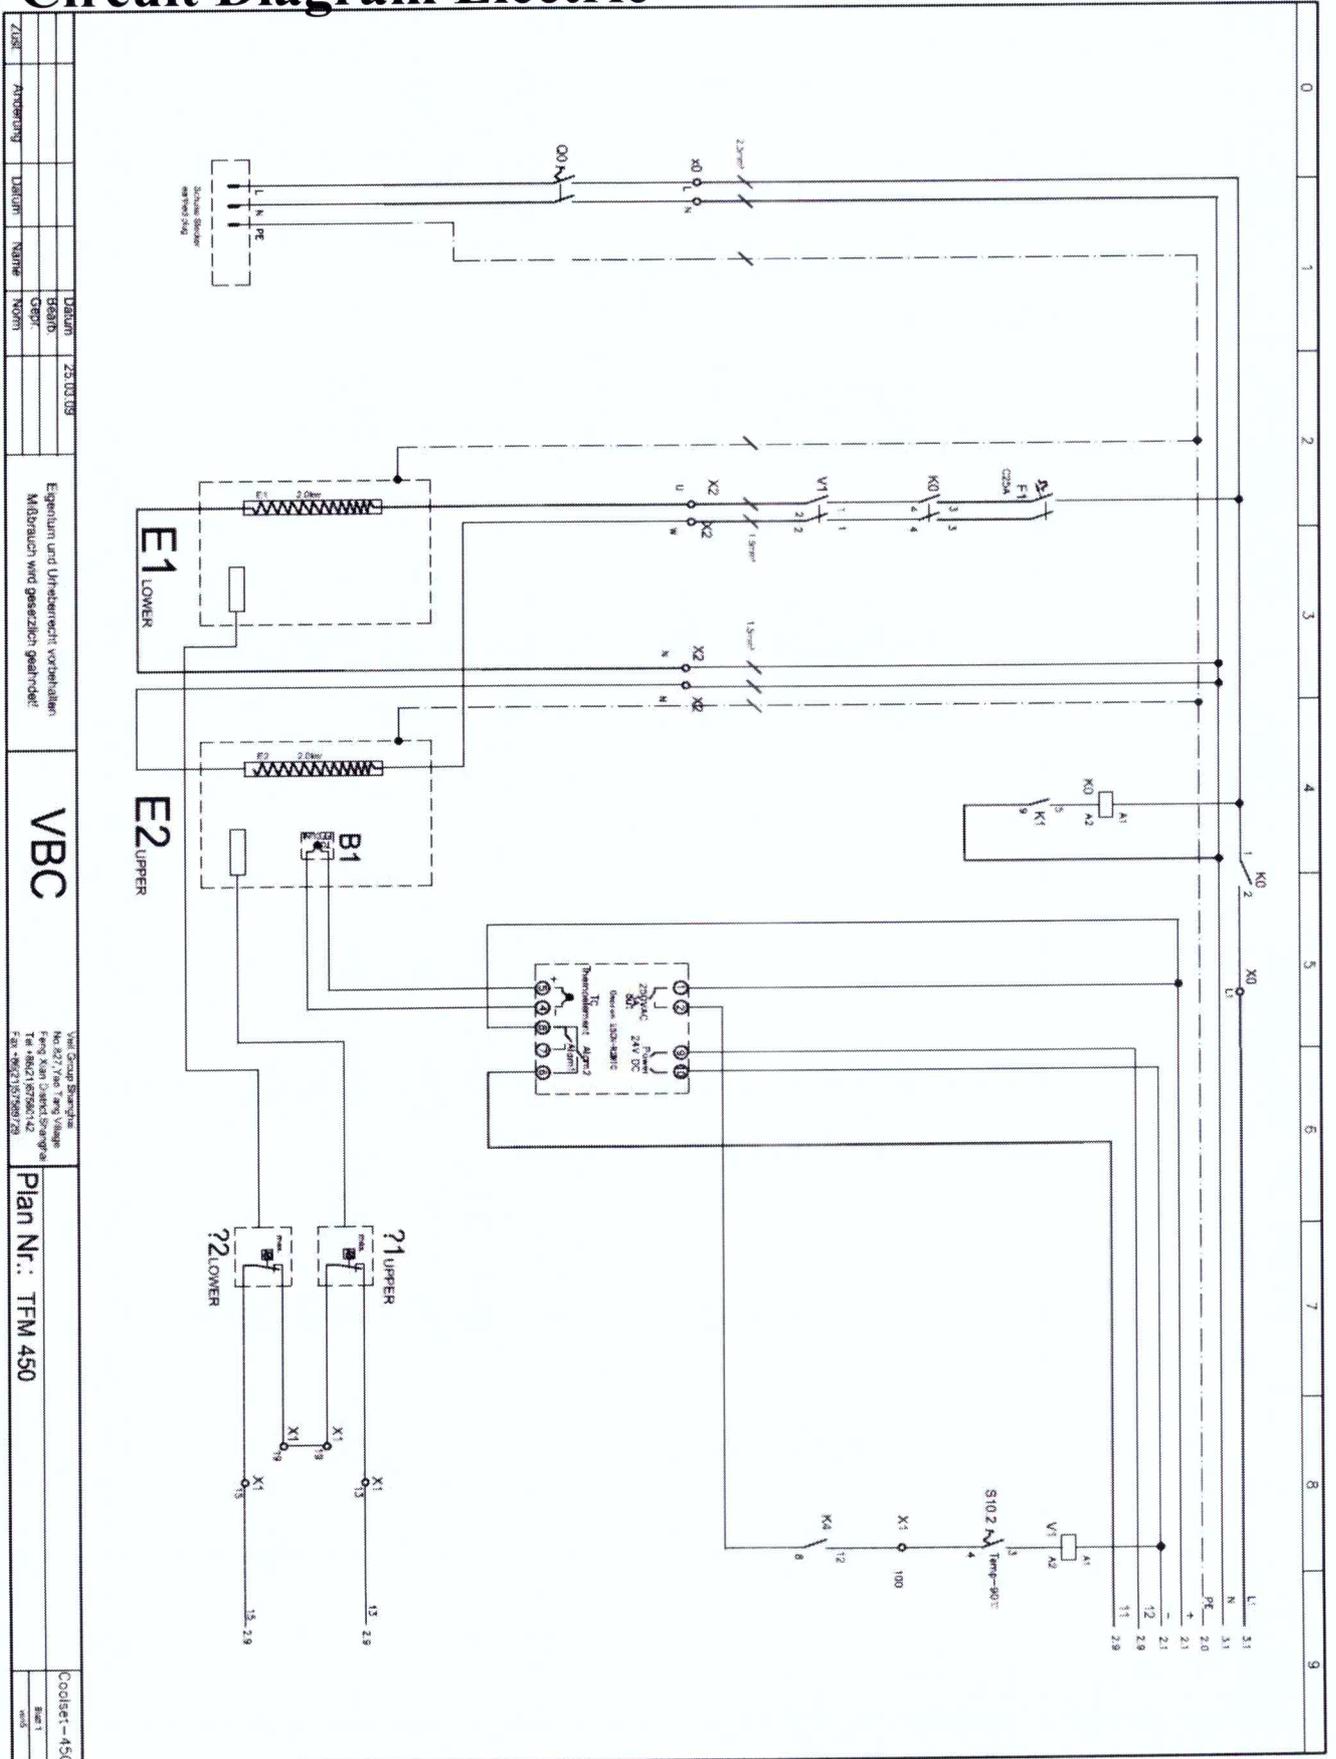


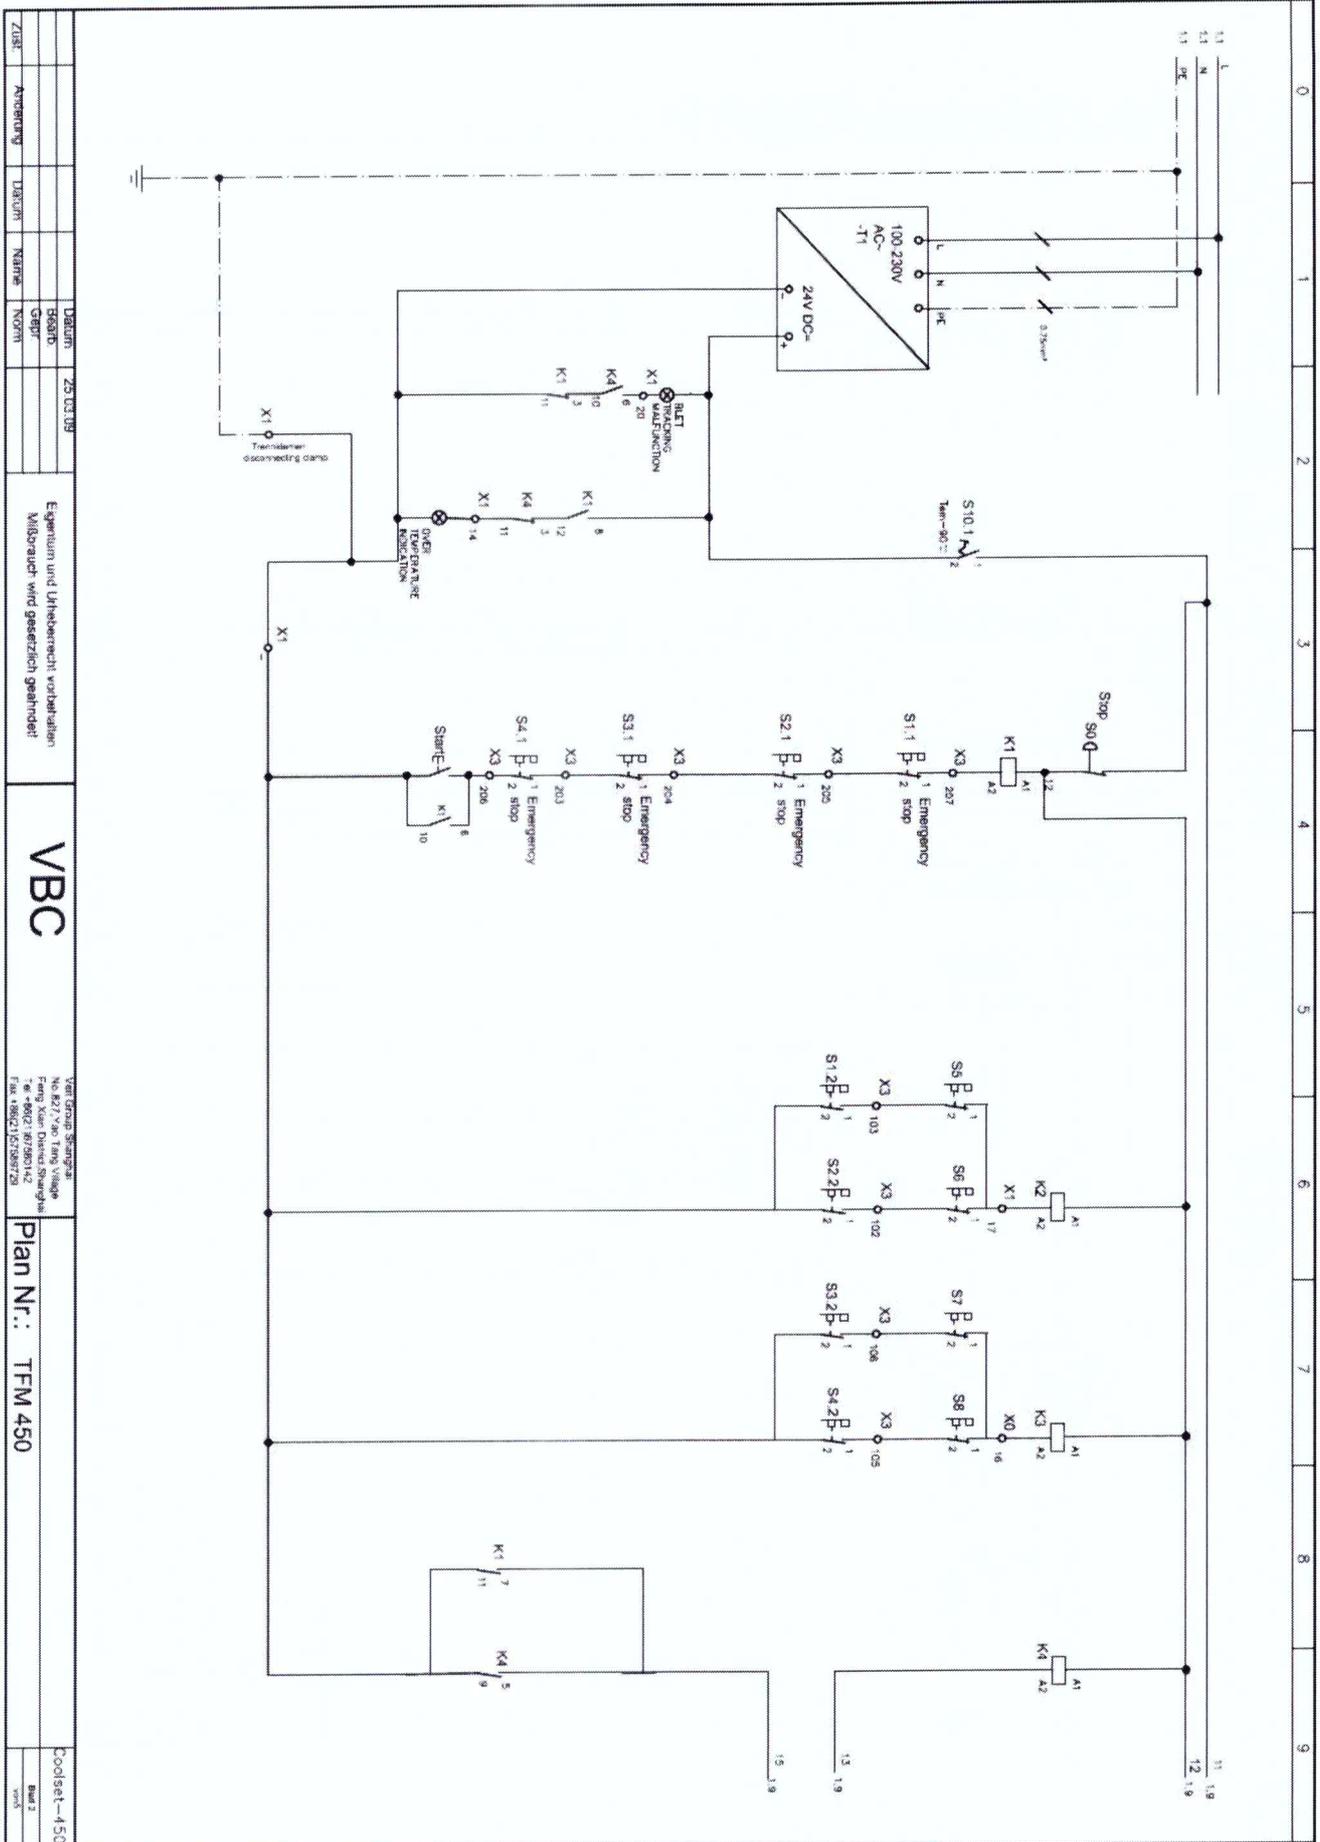

| | | | | | |
|------------------|------------------|---------------------------------------|-----|-------------------|-------------------------------|
| ZUR: Anfertigung | DARFEN: 25.03.09 | Eigentum und Urheberrecht vorbehalten | VBC | Plan Nr.: TFM 450 | Coolset-450 Blatt 2 vms |
| DARFEN: 25.03.09 | REBET: 08/09 | Misbrauch wird gesetzlich geahndet! | | | |

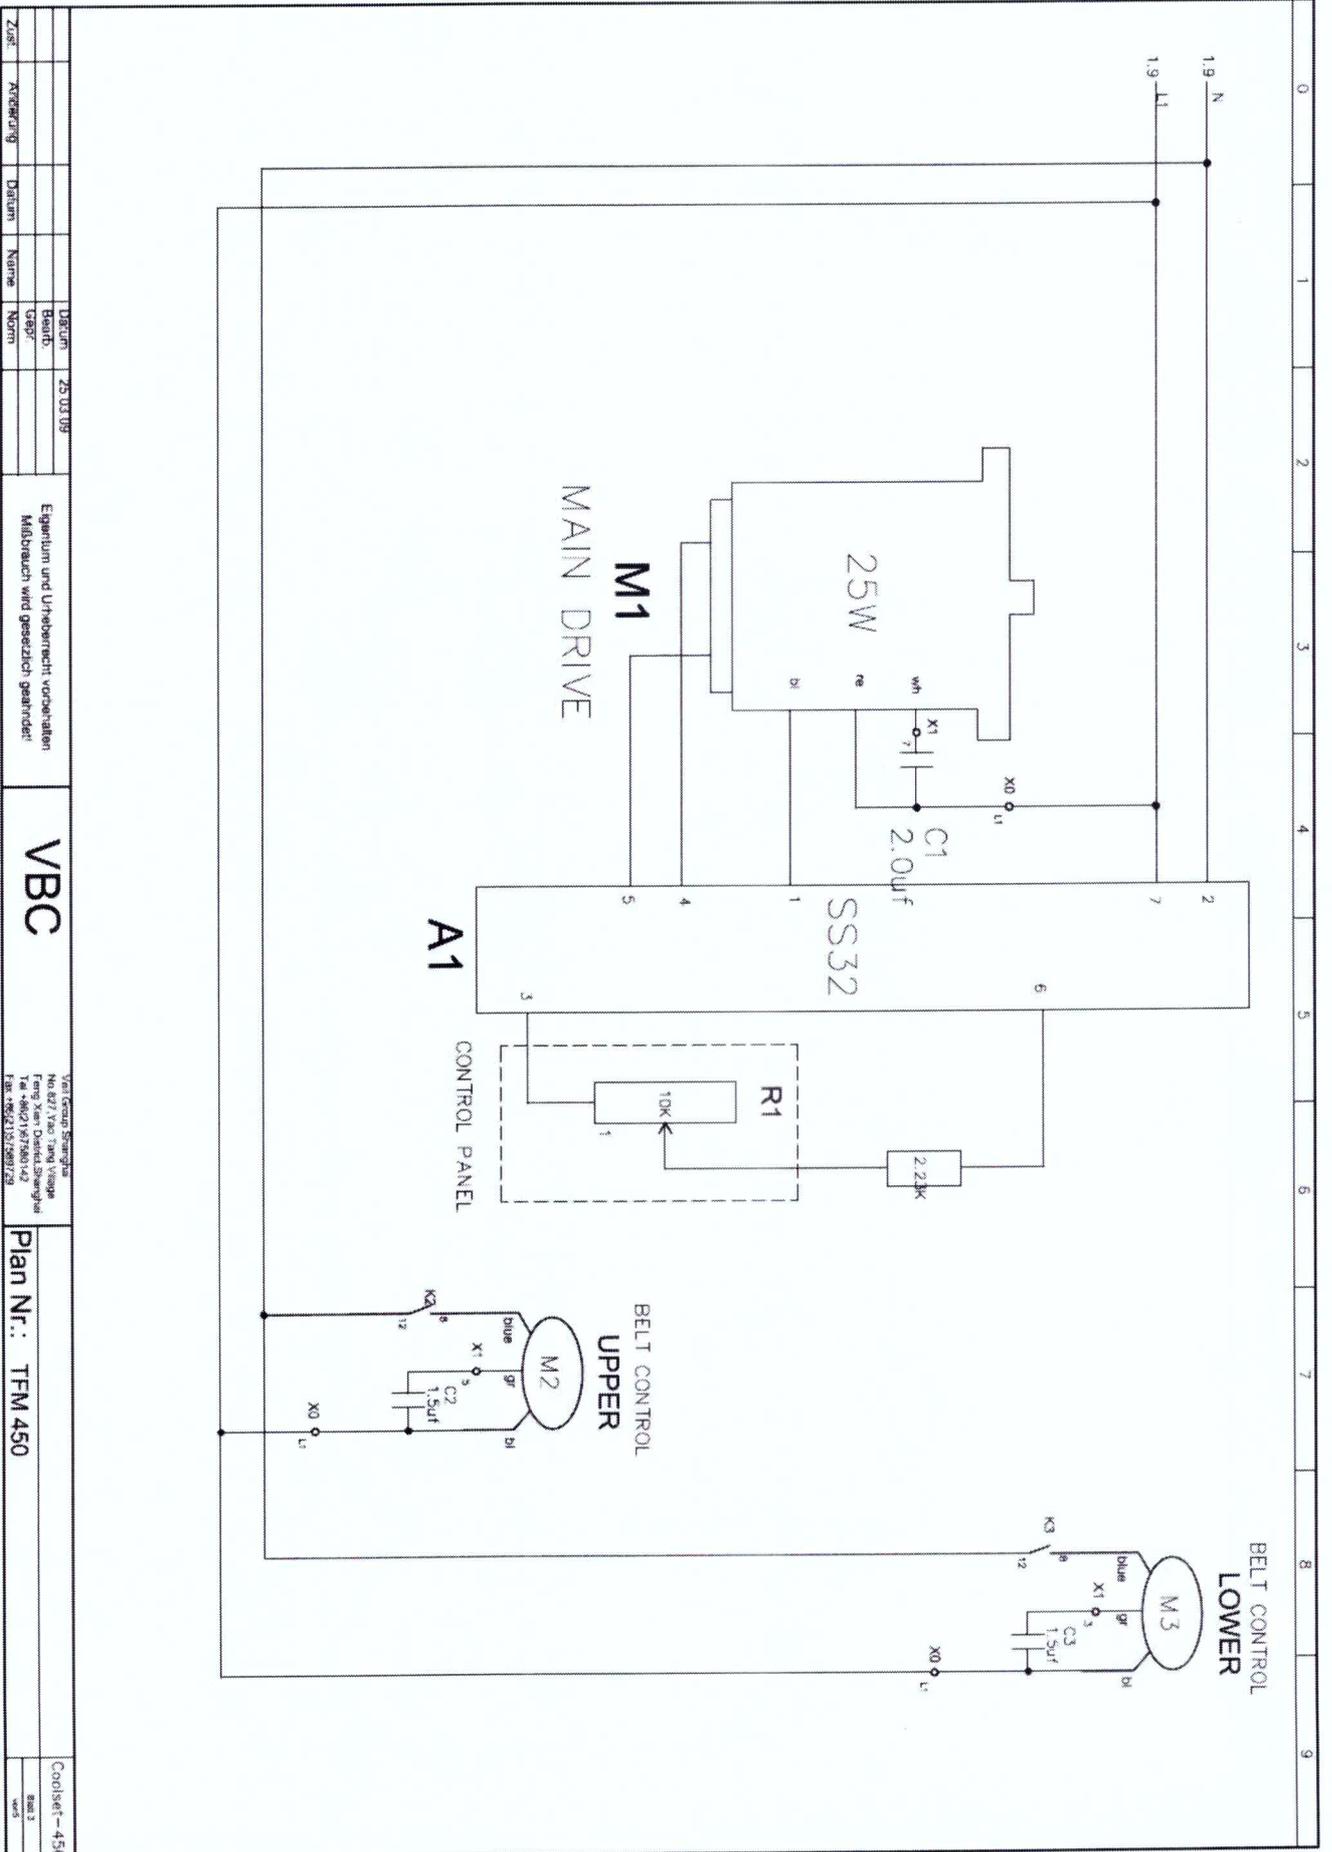

| | | | | | | | | | | | | |
|-------|-----------|--------|-------|-------|--------|-----------|--------|---------------------------------------|-----|---|-------------------|-------------|
| Zust: | Änderung: | Datum: | Name: | Norm: | Datum: | 25.03.199 | Handl: | Eigentum und Urheberrecht vorbehalten | VBC | Von Guang Shenghua No. 827, Yao Tang Village Feng Xian District, Shanghai Tel: +8621 987980142 Fax: +8621 987980128 | Plan Nr.: TFM 450 | Coolset-450 |
|-------|-----------|--------|-------|-------|--------|-----------|--------|---------------------------------------|-----|---|-------------------|-------------|

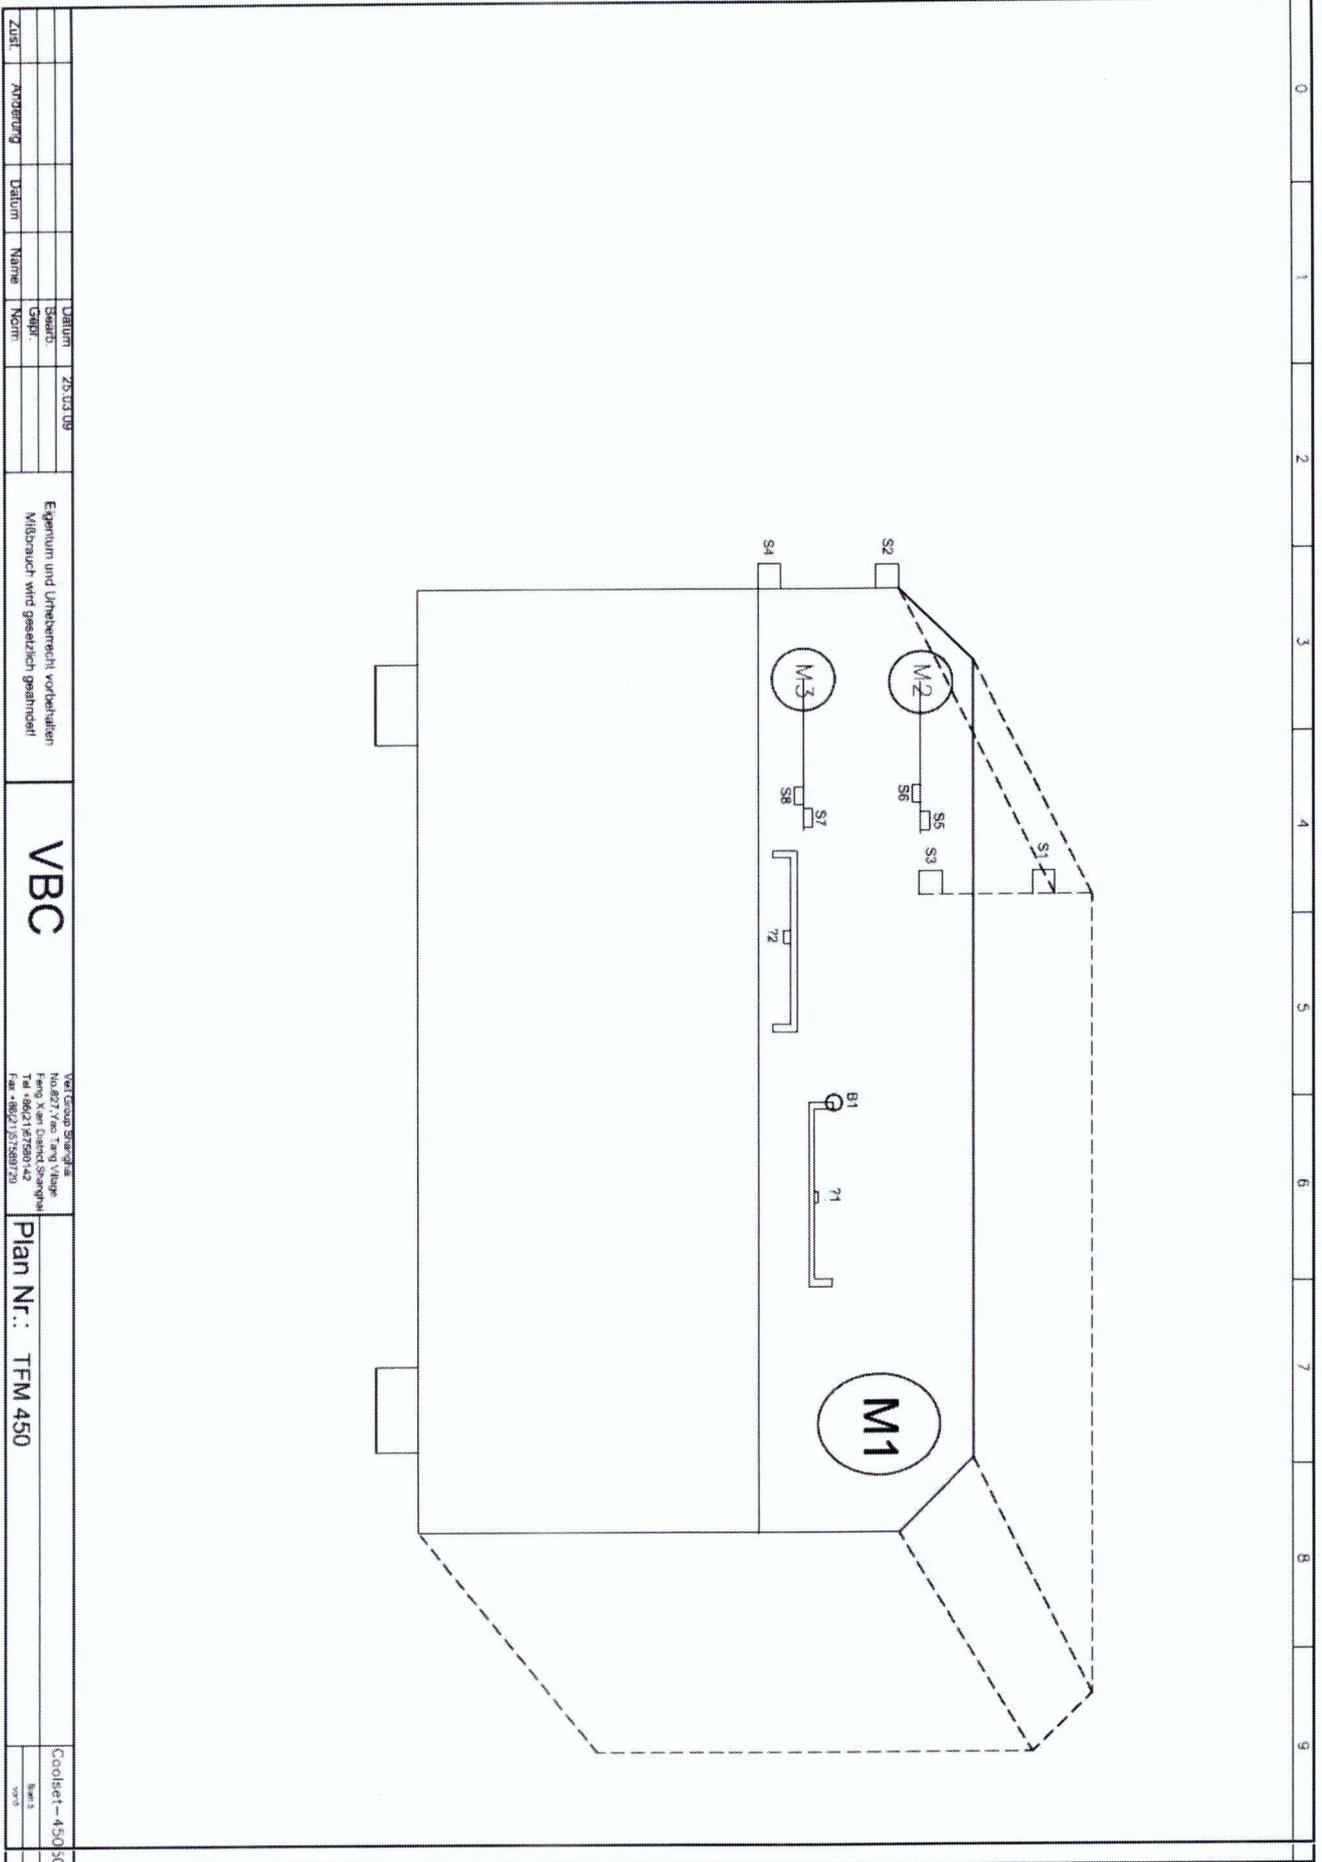

7. EC Declaration of Conformity

**EG-Konformitätserklärung / EC declaration of conformity / Déclaration "CE" de conformité
EF-overensstemmelseserklæring / EG-verklaring van overeenstemming
Declaración CE de conformidad / Dichiarazione CE di conformità / Declaração CE de
conformidade**

VEIT Uniset S / S+B (4235, 4435, 4255, 4455) Seriennr. / Serial no: -----

Hiermit erklären wir, dass die Bauart des genannten Geräts in der gelieferten Ausführung folgenden einschlägigen Richtlinien entspricht:

Herewith we declare that the supplied model complies with the following provisions applying to it:

Par la présente, nous déclarons, que le modèle fourni correspond aux dispositions pertinentes suivantes:

Hermed erklæres, at produkttypen er i overensstemmelse med fØlgende bestemmelser:

Hiermede verklaren wij, dat de in de handel gebrachte machine voldoet ann de eisen van de in het vervolg genoemde bepalingen:

Por la presente, declaramos que el modelo suministrado satisface las disposiciones pertinentes siguientes:

Con la presente, si dichiara che il modello fornito è conforme alle seguenti disposizioni pertinenti:

Com a presente, declaramos que o modelo fornecido da está em conformidade com as disposições pertinentes, a saber:

EG-Richtlinie Maschinen 2006/42/EG

EMV-Richtlinie 2004/108/EG

Angewandte harmonisierte Normen, insbesondere:

Applied harmonized standards, in particular:

Harmoniserede standarder, der blev anvend, i særdeleshed:

Normes harmonisées utilisées, notamment:

Gebruikte geharmoniseerde normen, in het bijzondere: particularmente:

Normas armonizadas utilizadas,

Norme armonizzate applicate in particolare: particular:

Normas armonizadas utilizadas, em

DIN EN ISO 12100-1

DIN EN ISO 12100-2

DIN EN 60204-1

DIN EN 61000-6-2

DIN EN 61000-6-4

DIN EN 55011

Bevollmächtigter für die Zusammenstellung der technischen Unterlagen:

Authorized representative for the compilation of the technical documents:

Fondé de pouvoir pour l'établissement des documents techniques:

Bemyndiget til sammenstilling af de tekniske dokumenter:

Gemachtigde voor de samenstelling van de technische stukken:

Procurador com poderes para a compilação da documentação técnica:

La persona autorizada para la disposición de los documentos técnicos:


Delegato per la compilazione dei documenti tecnici:

Firma VEIT GmbH, Justus-von-Liebig-Straße 15, D-86899 Landsberg

Veit Group Zhejiang

Veit Zhejiang Co, Ltd No.1111 Dongxi Road, Haiyan Country Zhejiang Province China 314304

Zhejiang, 13 JULY 2012



General manager Christopher Veit

COOLSET

Coolset TFM 450
Coolset TFM 450 Table Fusing Machine